

Redundancy Transfer Switch



www.powersolve.com.tw

RTS Series
10-32 Amps
Dual Input




Features

- Dual AC Inputs
- Input & Output Alarms
- LED Indicators for Input & Output Status

Electrical Specification

		MODEL NUMBER		
		RTS-10	RTS-16	RTS-32
INPUT	Voltage (VAC)	110/230	110/230	110/230
	Frequency (Hz)	60/50 ±5%	60/50 ±5%	60/50 ±5%
	Current (A)	10	16	32
OUTPUT	Voltage (VAC)	110/230	110/230	110/230
	Transfer Time (ms)	≤4	≤4	≤4
	Outlets	2 x IEC Outlets 2 x IEC-2073 Outlets and Terminal Block		Terminal Blocks
	Alarm	Input & output alarms		
OTHER	Panel Display	LED indicators for status of inputs & output		
	Temperature (°C)	0-40	0-40	0-40
	Humidity	0-90% non-condensing		
	Dimension (WxDxH)	484x285x44	484x285x44	484x285x44
	Weight (kg)	3.5	3.5	3.5

1. Inverter system

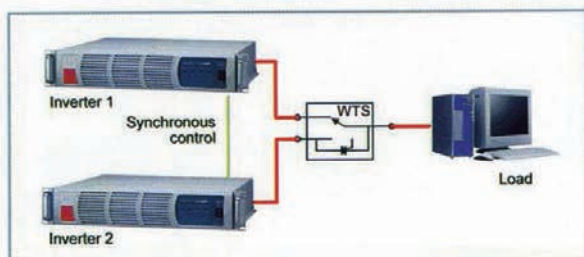

2. UPS system

