

125W ~ 300W AC-DC SWITCHING POWER SUPPLY JB320D DUAL OUTPUT SERIES

FEATURES:

- ◆ Compact 300W with 1U height Power Density: 8.3 watts/cu in
- ◆ Low Leakage Current 500uA @ 240Vac / 300uA @ 120Vac
- ◆ 5/ 12/ 24V Dual Output Optional Combinations
- ◆ Power Factor Corrected to EN61000-3-2 class A
- ◆ Variable Fan Speed & Low Acoustical Noise
- ◆ High Quality & Reliable Component Usage
- ◆ Approved to UL CUL TUV CB and CE
- ◆ AC Input Range Auto-Selectable
- ◆ 4 - Mechanical Options



PRODUCT SPECIFICATIONS:



Input Voltage: 90-132 / 180-264Vac auto-ranging, 47~63Hz.
Input Current: 8/4A at 100-120/200-240Vac.
Inrush Current: Max. 70A@230Vac & 35A@115Vac; cold start.
PFC: Power Factor Correction pass EN61000-3-2 class A.
Transient Response: Returns to within 1% in less than 2.5mS for a 50% load change and the peak transient does not exceed 5%.
Overshoot: Turn-on & off overshoot < 5% over nominal voltage.
Efficiency: 75% ~ 85% depends on model.
Turn On Delay: 1 second maximum at 230 Vac.
Hold Up Time: 20mS min. at 80% of full load.
Adjustability: Output user adjustable +/-5% minimum.
Fan Drive: 12VDC/400mA offering to drive an external fan.
Fan Fail (FF) Alarm: Designated as FF on pin 3 of CN1, two types of logical signal provided, contact manufacturer.
Power Supply On: Green LED designated as LED1 on the PCB.
Power Good: PG on CN1 goes high 100-500mS after DC regulation and low at least 1mS before loss of regulation (Open collector).
Input Fusing Protection: One T8A/250V fuse inserted in primary.
Over-Power Protection: 110~140% of I-Max; Auto-recovery.
Short Circuit Protection: Trip without damage and auto-recovery.
Over Voltage Protection: Unit latching down when output exceed 130% and recycle AC input to reset.
Over-Temperature Protection: Unit protected of excessive operating ambient 110 °C, and automatic recovery.
Switching Frequency: 23K Hz fixed frequency.
Operating Temperature: 0°C to 70°C ambient, de-rating at 2.5% per degree from 50°C to 70°C.
Storage Temperature: -20 to 85 °C.
Storage Humidity: 5% to 95% RH, Non-condensing.
Burn in: 45 +/- 5 degree C for 1 hour @230Vac with full load.

Operating Humidity: 5% to 90% RH, Non-condensing.
Vibration: 5 ~ 50 Hz, acceleration 7.35 m/s² on X, Y and Z Axis.
EMC: EN 55032: 2015+A11: 2020
 •EN 61000-3-2: 2014, EN 61000-3-3: 2013
EN 55035: 2017+A11: 2020
 •IEC 61000-4-2: 2008, IEC 61000-4-3: 2020
 •IEC 61000-4-4: 2012, IEC 61000-4-5: 2014+A1:2017
 •IEC 61000-4-6: 2013+C1: 2015, IEC 61000-4-8: 2009
 •IEC 61000-4-11: 2020+C1:2020
Safety Regulation: UL62368-1, EN62368-1, IEC62368-1.
Leakage Current: < 1mA @ 264Vac.
HI-POT Test: 1600 VAC input line to chassis (10mA DC cut off current); Isolating 3000VAC primary to secondary windings; Primary to core 1800VAC. All for 3 sec.
Grounding Test: Apply 25 A from ground pin of the three prong plug to the far most earth. Max allowable resistance 0.1 ohm.
Warranty: 2 years.
MTBF: 100000 Hrs (according to MIL-HBK-217F) at 30 °C .
Cooling:
 U Type: U-Chassis @300W max. with 18CFM airflow or 150W max. convection cooling
 C Type: U-Chassis with top cover @150W max. convection cooling
 E Type: Enclosed with side built-in fan @300W max.
 F Type: Enclosed with top built-in fan @300W max.
Enclosure:
 U Type: 6(L) x 4(W) x 1.5(H) inches.
 C Type: 6(L) x 4(W) x 1.55(H) inches.
 E Type: 7(L) x 4(W) x 1.6(H) inches.
 F Type: 6(L) x 4(W) x 2(H) inches.
Weight: Maximum weight is 800g.

OUTPUT VOLTAGE / CURRENT RATING CHART: Measured at output power connector.

Model Number	Output Voltage	Max. Output Current		Regulation	Ripple & Noise
		Type U (force air) & E & F	Type U, C (Convection)		
JB320Dx-0512	V1:+5V	30A	15A	+/- 5%	1%
	V2:+12V	16.67A	10.42A	+/- 5%	1%
JB320Dx-0524	V1:+5V	30A	15A	+/- 5%	1%
	V2:+24V	8.33A	5.2A	+/- 5%	1%
JB320Dx-1224	V1:+12V	16.67A	12.5A	+/- 5%	1%
	V2:+24V	8.33A	6.25A	+/- 5%	1%

Note:

* JB320D series are designated as JB320Dx-y where x can be **U** (U-Chassis), **C** (U-Chassis with top cover), **E** (Enclosed Type with side built-in Fan) or **F** (Enclosed Type with side built-in Fan); y can be **0512**, **0524** and **1224**.

* **JB320DU** (with min. 18CFM forced air flow) & **JB320DE** & **JB320DF** Series:

Max. 300W total combined power of V1 and V2 for JB320Dx-1224 and 250W for other models.

* **JB320DU** and **RL0601DC** Series with convection cooling:

Max. 150W total combined power of V1 and V2 for RL0601Dx-1224 and 125W for other models.

* Ripple and noise is measured from 10KHZ to 20MHz bandwidth at output with parallel 0.1µF ceramic and 22µF electrolytic capacitors.

* 10% minimum load is required to maintain the ripple and regulation.

* Output is fully isolated.

OUTLINE DRAWING:

Input and Output Connector (CN2):

Terminal block - Howder Part No. HB-95-7P

Molex - Mating JST VH series. Input 5 pin connector (3 pin used, pin 2 & pin 4 removed),

PCB labeling: L = Line; N = Neutral; G = Chassis Ground. Output 10 pin connector.

Input and Output Connector Pin Assignment:

(See table in right).

Mounting Inserts:

6 Places 8-32 (M4X0.7 Optional). Maximum Penetration 2.1mm sees outline drawing for location.

Logic signal connector (CN1):

Mating JST XHP-3 or equivalent (CHYAO SHIUNN JS-2001-03);

Mating Pins: JST SXH-002T-P0.6 FOR AWG 30 to 26.

Fan driver connector (FAN2):


Mating connector is JST P/N XHP-2 (2 pins 0.98 pitch) or equivalent (CHYAO SHIUNN JS-2001-02).

Howder	Molex
Pin 1: V1	Pins 1 ~ 3: V1
Pin 2 ~ 3: RTN	Pins 4 ~ 8: RTN
Pin 4: V2	Pins 9 ~ 10: V2
Pin 5: GND	Pin 11: GND
Pin 6: Neutral	Pin 13: Neutral
Pin 7: Line	Pin 15: Line


JB320D Series 300W Dual Output



JB320DU Series (U-Chassis Type): 6(L) x 4(W) x 1.5(H) inches; Weight: 600g.

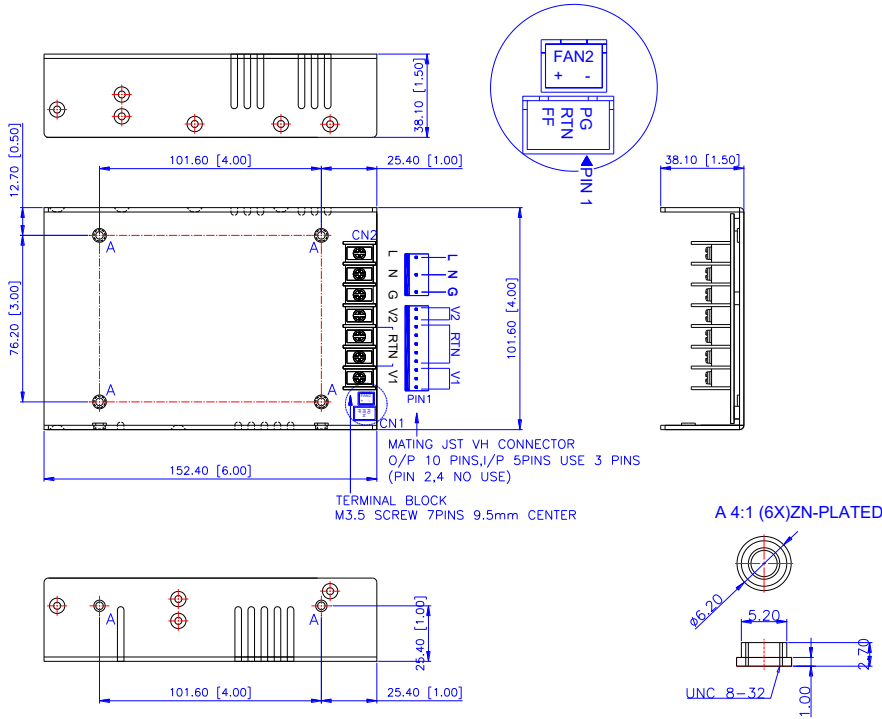


JB320DC Series (U-Chassis with Top Cover Type): 6(L) x 4(W) x 1.55(H) inches; Weight: 650g.

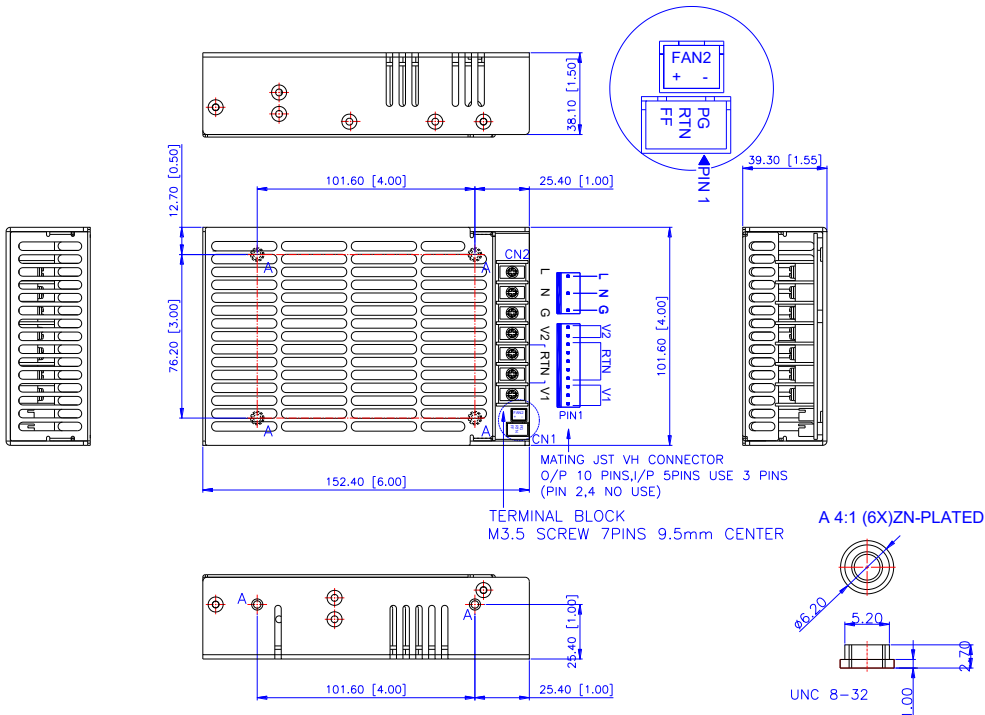


JB320D Series 300W Dual Output



JB320DE Series (Enclosed with Side built-in Fan Type): 7(L) x 4(W) x 1.6(H) inches; Weight: 750g.

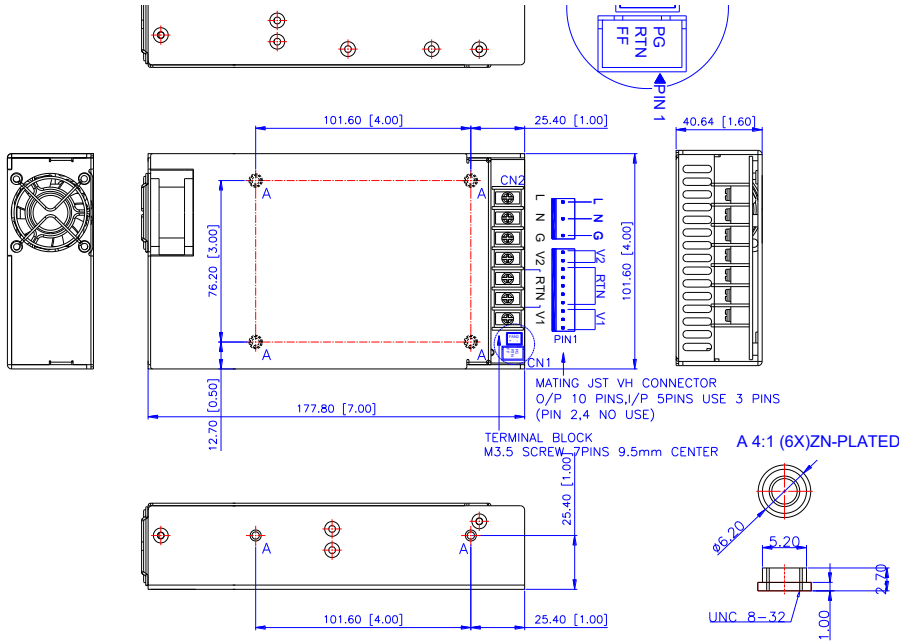

JB320DF Series (Enclosed with Top built-in Fan Type): 6(L) x 4(W) x 2(H) inches; Weight: 800g.

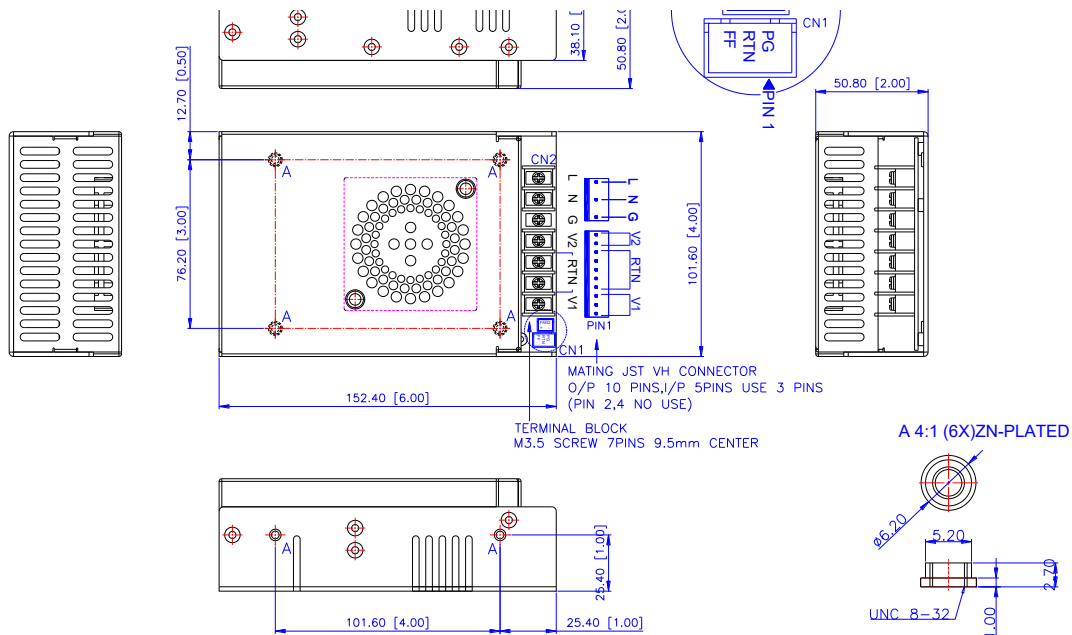

Specifications subject to change without notice.