




Three phase input

## SM6000 - Series 6000W DC POWER SUPPLIES

Models	Voltage range	Current range
SM 15-400	0 - 15 V	0 - 400 A
SM 30-200	0 - 30 V	0 - 200 A
SM 45-140	0 - 45 V	0 - 140 A
SM 60-100	0 - 60 V	0 - 100 A
SM 70-90	0 - 70 V	0 - 90 A
SM 120-50	0 - 120 V	0 - 50 A
SM 300-20	0 - 300 V	0 - 20 A
SM 600-10	0 - 600 V	0 - 10 A



### Features

- cTUVus safety approval
- Designed for long life at full power
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- EMC surpasses CE requirements: low emission & high immunity
- Low audible noise: temperature controlled fans
- Available options: analog & digital Interfaces, High Speed Programming, Digital Encoders, Sequencer, Power Sink etc.

### Functionalities

- Master/Slave parallel and series operation with voltage and current sharing
- Stacking is allowed, space between units is not required
- High power system configuration from multiple units
- 19" rack mounting or laboratory use (feet included)
- Remote sensing
- Interlock

	SM 15-400	SM 30-200	SM 45-140	SM 60-100	SM 70-90	SM 120-50	SM 300-20	SM 600-10
<b>DC Power terminals</b> voltage current	0 - 15 V 0 - 400 A	0 - 30 V 0 - 200 A	0 - 45 V 0 - 140 A	0 - 60 V 0 - 100 A	0 - 70 V 0 - 90 A	0 - 120 V 0 - 50 A	0 - 300 V 0 - 20 A	0 - 600 V 0 - 10 A
<b>AC Input</b> 3 phase, 48 - 62 Hz rated voltage range rated frequency rated current  current (400 V / 3 ph, full load) power factor, 100%, 50% load  internal fuses standby input power ( $V_o=I_o=0$ ) standby input power ( $V_o=V_{max}$ )	342-528 V 380-480 V 50 / 60 Hz max 12.2A  10.2 A 0.98, 0.97  15 AT 55 W 110 W	342-528 V 380-480 V 50 / 60 Hz max 12.2A  10 A 0.98, 0.97  15 AT 55 W 110 W	342-528 V 380-480 V 50 / 60 Hz max 12.2A  10.3 A 0.98, 0.97  15 AT 55 W 110 W	342-528 V 380-480 V 50 / 60 Hz max 12.2A  10 A 0.98, 0.97  15 AT 55 W 110 W	342-528 V 380-480 V 50 / 60 Hz max 12.2A  10.4 A 0.98, 0.97  15 AT 55 W 130 W	342-528 V 380-480 V 50 / 60 Hz max 12.2A  9.9 A 0.98, 0.97  15 AT 55 W 130 W	342-528 V 380-480 V 50 / 60 Hz max 12.2A  10 A 0.98, 0.97  15 AT 55 W 120 W	342-528 V 380-480 V 50 / 60 Hz max 12.2A  10 A 0.98, 0.97  15 AT 55 W 130 W
<b>Efficiency</b> 400 V AC, 3 ph input, full load	87 %	89 %	90 %	89 %	89 %	89 %	89 %	89 %
<b>Regulation</b>								
Load 0 - 100% <b>CV</b> Line 342 - 457 V AC <b>CV</b> (external voltage sense)	2.5 mV 0.2 mV	5 mV 0.5 mV	5 mV 1 mV	5 mV 2 mV	5 mV 2 mV	8 mV 2 mV	15 mV 3 mV	20 mV 4 mV
Load 0 - 100% <b>CC</b> Line 342 - 457 V AC <b>CC</b> (internal voltage sense, after warm up)	24 mA 4 mA	12 mA 2 mA	9 mA 1.5 mA	6 mA 1 mA	5 mA 1 mA	3 mA 0.5 mA	1.2 mA 0.2 mA	1.0 mA 0.2 mA
<b>Ripple + noise</b> rms (BW=300 kHz) <b>CV</b> p-p (BW=20 MHz) <b>CV</b>  rms (BW=300 kHz) <b>CC</b> p-p (BW=20 MHz) <b>CC</b> CC-ripple at full load	0.8 mV 8 mV  100 mA 300 mA	1 mV 8 mV  20 mA 60 mA	1.5 mV 10 mV  8 mA 25 mA	2 mV 10 mV  3 mA 10 mA	2 mV 10 mV  3 mA 10 mA	3 mV 25 mV (20 mV @ full load) 3 mA 10 mA	5 mV 50 mV (30 mV @ full load) 2 mA 5 mA	10 mV 100 mV (80 mV @ full load) 2 mA 5 mA
<b>Temp. coeff., per °C<sup>-1</sup></b> <b>CV</b> <b>CC</b>								35.10 <sup>-6</sup> 60.10 <sup>-6</sup>
<b>Stability</b> <sup>1</sup> after 1 hr warm-up during 8 hrs <b>CV</b> <b>CC</b>  $t_{amb} = 25 \pm 1$ °C, $V_{in} = 400$ VAC (internal voltage sensing for CC-stab.)								5.10 <sup>-5</sup> 10.10 <sup>-5</sup>

<b>Analog Programming</b> <i>Not applicable for SM300-20 &amp; SM600-10: see below ISO AMP specs</i>	<b>CV</b>	<b>CC</b>
<b>Programming inputs</b> input range accuracy offset temp. coeff. offset input impedance	0 - 5 V $\pm 0.2\%$ - 0.1 ... +1.3 mV (on 5V) 10 $\mu$ V / °C > 1 MOhm	0 - 5 V $\pm 0.5\%$ 0 ... +2.2 mV (on 5V) 50 $\mu$ V / °C > 1 MOhm
<b>Monitoring outputs</b> input range accuracy offset temp. coeff. offset input impedance	0 - 5 V $\pm 0.2\%$ - 1 ... 0 mV (on 5V) 3 $\mu$ V / °C 2 Ohm / max. 4mA	0 - 5 V $\pm 0.2\%$ - 1.1 ... 0 mV (on 5V) 60 $\mu$ V / °C 2 Ohm / max. 4mA
<b>ISO AMP Programming</b> <i>optional for low volt. units up to 120V, standard on SM300-20 and SM600-10.</i>	Isolated analog programming, range 0 - 5 V / 200 kOhm or 0 - 10 V / 400 kOhm. See datasheet ISO AMP on <a href="http://www.DeltaPowerSupplies.com">www.DeltaPowerSupplies.com</a> for accuracy, offset etc.	

<b>Reference voltage</b> on prog. connector	$V_{ref}$ TC	5.114 $\pm$ 15 mV ( $R_o = 2$ Ohm, max. 4 mA) 20 ppm
<b>+12 V output</b> on prog. Connector	$V_o$ $I_{max}$ $R_o$	12 V $\pm$ 0.2 V 0.2 A 3 Ohm

Notes: 1. Measured at full load. 2. See "Safety instructions".

<b>Status Outputs</b>	CC - status LIM - status OT - status PSOL - status ACF - status DCF - status	CC - operation CV or CC limit Over Temperature Power Sink Overload AC - Fail DC - Fail <sup>1)</sup>	5 V = logic 1 (Ro = 500 Ohm) 5 V = logic 1 (Ro = 500 Ohm) 5 V = logic 1 (Ro = 500 Ohm) 5 V = logic 1 (Ro = 500 Ohm) 5 V = logic 1 (Ro = 500 Ohm) 5 V = logic 1 (Ro = 500 Ohm)
<b>Relay Outputs</b>	ACF DCF	AC - Fail DC - Fail <sup>1)</sup>	both NO and NC contact both NO and NC contact <sup>1)</sup> output ± 5% beyond set point
<b>Remote shutdown</b>	with + 5 V, 1 mA or relay contact		
<b>Interlock</b>	contact at rear panel, see photo of rear panel on page		
<b>Indicators</b> (front panel)	AC-Fail, DC-Fail, Over Temperature, Power Sink Overload, Remote-ShutDown, Remote-CV, Remote-CC, Output On, CV-limit, CC-limit, CV- and CC- mode		
<b>Controls</b> (front panel)	Mains on/off, CV-and CC-potmeter, CV- and CC-limit-potmeter, Display-Settings button, Display-Limits button, Remote/Local, Output On/Off, Front panel Lock		

	SM 15-400	SM 30-200	SM 45-140	SM 60-100	SM 70-90	SM 120-50	SM 300-20	SM 600-10
<b>Programming speed</b> <i>Standard Version</i> (resistive load)								
<b>Rise time (10 - 90%)</b> output voltage step time, (100 % load) time, (10 % load)	0 → 15 V 3.3 ms 1.3 ms	0 → 30 V 6.4 ms 2.5 ms	0 → 45V 2.7 ms 1.1 ms	0 → 60 V 5.4 ms 2.2 ms	0 → 70 V 6.8 ms 2.8 ms	0 → 120 V 5.1 ms 1.9 ms	0 → 300 V 8.5 ms 3.2 ms	0 → 600 V 12 ms 4.8 ms
<b>Fall time (90 - 10%)</b> output voltage step time, (100 % load) time, (10 % load)	15 → 0 V 3.5 ms 34 ms	30 → 0 V 6.7 ms 67 ms	45 → 0 V 2.9 ms 32 ms	60 → 0 V 5.8 ms 59 ms	70 → 0 V 7.7 ms 77 ms	120 → 0 V 4.9 ms 52 ms	300 → 0 V 8.3 ms 83 ms	600 → 0 V 12 ms 120 ms
<b>Programming speed</b> <i>Optional High Speed</i> (resist. load)	<b>SM 15-400</b> <i>option 166</i>	<b>SM 30-200</b> <i>option 167</i>	<b>SM 45-140</b> <i>option 168</i>	<b>SM 60-100</b> <i>option 169</i>	<b>SM 70-90</b> <i>option 170</i>	<b>SM 120-50</b> <i>option 171</i>	<b>SM 300-20</b> <i>option 172</i>	<b>SM 600-10</b> <i>option 270</i>
<b>Rise time (10 - 90%)</b> output voltage step time, (100 % load) time, (10 % load)	0 → 15 V 0.40 ms 0.38 ms	0 → 30 V 0.41 ms 0.38 ms	0 → 45V 0.53 ms 0.16 ms	0 → 60 V 0.44 ms 0.41 ms	0 → 70 V 0.62 ms 0.40 ms	0 → 120 V 0.57 ms 0.19 ms	0 → 300 V 1.1 ms 0.44 ms	0 → 600 V 1.9 ms 0.80 ms
<b>Fall time (90 - 10%)</b> output voltage step time, (100 % load) time, (10 % load)	15 → 0 V 0.39 ms 1.5 ms	30 → 0 V 0.41 ms 3.6 ms	45 → 0 V 0.26 ms 10 ms	60 → 0 V 0.57 ms 5.6 ms	70 → 0 V 0.50 ms 6.2 ms	120 → 0 V 0.38 ms 4.2 ms	300 → 0 V 1.0 ms 10 ms	600 → 0 V 2.2 ms 20 ms
<b>Ripple</b> @ full load typical (rms/pp)	6/20mV	28/80mV	34/80mV	34/90mV	38/100mV	30/120mV	48/150mV	35/220mV
<b>Output Capacitance</b> (typical)	1200 µF	800 µF	520 µF	330 µF	290 µF	73 µF	32 µF	19 µF

	SM 15-400	SM 30-200	SM 45-140	SM 60-100	SM 70-90	SM 120-50	SM 300-20	SM 600-10
<b>Recovery time</b> recovery within di/dt of load step output voltage time, @ 50 - 100% load step max. deviation	60 mV 5 A/µs 13 V 120 µs 320 mV	50 mV 2.5 A/µs 25 V 100 µs 260 mV	100 mV 1.8 A/µs 40 V 100 µs 380 mV	100 mV 1.3 A/µs 55 V 100 µs 250 mV	100 mV 1.7 A/µs 65 V 100 µs 280 mV	0.5 V 1 A/µs 110 V 100 µs 1 V	1 V 0.25 A/µs 280 V 100 µs 1.8 V	1 V 0.12 A/µs 560 V 100 µs 1.8 V
<b>Output impedance</b> CV, 0-1 kHz CV, 1-100 kHz	< 0.5 mΩ < 2.3 mΩ	< 1.2 mΩ < 5 mΩ	< 1.7 mΩ < 10 mΩ	< 1.5 mΩ < 12 mΩ	< 1.8 mΩ < 12 mΩ	< 11 mΩ < 90 mΩ	< 34 mΩ < 330 mΩ	< 70 mΩ < 700 mΩ
<b>Pulsating load</b> max. tolerable AC component of load current f > 1 kHz f < 1 kHz	30 A <sub>rms</sub> 400 A <sub>peak</sub>	35 A <sub>rms</sub> 200 A <sub>peak</sub>	20 A <sub>rms</sub> 140 A <sub>peak</sub>	20 A <sub>rms</sub> 100 A <sub>peak</sub>	20 A <sub>rms</sub> 90 A <sub>peak</sub>	10 A <sub>rms</sub> 50 A <sub>peak</sub>	5 A <sub>rms</sub> 20 A <sub>peak</sub>	2.5 A <sub>rms</sub> 10 A <sub>peak</sub>

<b>Insulation</b> AC mains / DC power terminals creepage / clearance AC mains / case DC power terminals / case	3750 V <sub>rms</sub> (1min.) 8 mm 2500 V <sub>rms</sub> 600 V DC <sup>2</sup>
<b>Safety</b>	cTUVus / EN 60950 / EN 61010
<b>EMC Emission Immunity</b>	EN 61326-1, class B equipment (for use in domestic establishments) EN 61326-1, equipment for use in industrial and domestic establishments

Notes: 1. Measured at full load. 2. See "Safety instructions".

<b>Operating Temperature at full load</b>	- 20 to + 50 °C derate output to 75% at 60 °C
<b>Humidity</b>	maximum 95% RH, non condensing, up to 40 °C maximum 75% RH, non condensing, up to 50 °C
<b>Storage temperature</b>	- 40 to + 70 °C
<b>Thermal protection</b>	output shuts down in case of insufficient cooling
<b>MTBF</b>	500 000 hrs

	SM 15-400	SM 30-200	SM 45-140	SM 60-100	SM 70-90	SM 120-50	SM 300-20	SM 600-10
<b>Hold-Up time</b> (@ 400 VAC input)								
$V_{out} = 100\%$ , $I_{out} = 100\%$	11 ms	11 ms	11 ms	11 ms	13 ms	13 ms	12 ms	11 ms
$V_{out} = 85\%$ , $I_{out} = 100\%$	23 ms	23 ms	23 ms	24 ms	23 ms	24 ms	24 ms	23 ms
$V_{out} = 100\%$ , $I_{out} = 50\%$	33 ms	28 ms	27 ms	28 ms	30 ms	32 ms	28 ms	27 ms
<b>Turn on delay</b> after mains switch on	200 ms							
<b>Inrush current</b>	20 A (electronic limit)							
<b>Phase loss</b>	Output shuts down in case of phase loss.							

	SM 15-400	SM 30-200	SM 45-140	SM 60-100	SM 70-90	SM 120-50	SM 300-20	SM 600-10
<b>Series operation</b> max. total voltage Master / Slave operation	600 V <sup>2</sup> yes							
<b>Parallel operation</b> Normal Master / Slave operation	no limit maximum 3 units							
<b>Remote sensing</b> max. voltage drop per load lead	2 V							
<b>Limits Voltage</b> adjust range <b>Current</b> adjust range	0 - 102 % 0 - 102 %							
<b>Front panel CV/CC-controls</b> resolution knob operation screwdriver adjustment  Lock function for CV/CC-settings Selectable Start-up at 0V / 0A or at last settings	analog potentiometers <sup>3)</sup> 10 turns (0.03%) standard optional (P001)  no no						digital encoders 10 or 64 turns <sup>4)</sup> standard no  yes yes	
	<i><sup>3)</sup>optional with digital encoders (P220) : specifications for controls are similar to SM300-20 and SM600-10.</i>						<i><sup>4)</sup>variable pitch depending on operation speed</i>	
<b>Meters</b> scale voltage scale current accuracy read output read limit setting (d = digit)	3.5 digit 0 - 15.00V 0 - 400 A 0.5% + 2d 2% + 2d	3.5 digit 0 - 30.0 V 0 - 200 A 0.5% + 2d 2% + 2d	3.5 digit 0 - 45.0 V 0 - 140.0A 0.5% + 2d 2% + 2d	3.5 digit 0 - 60.0 V 0 - 100.0A 0.5% + 2d 2% + 2d	3.5 digit 0 - 70.0V 0 - 90.0 A 0.5% + 2d 2% + 2d	3.5 digit 0 - 120.0V 0 - 50.0 A 0.5% + 2d 2% + 2d	3.5 digit 0 - 300 V 0 - 20.0 A 0.5% + 2d 2% + 2d	3.5 digit 0 - 600 V 0 - 10.0 A 0.5% + 2d 2% + 2d

<b>Mounting</b>	stacking of units allowed, air flow is from left to right							
<b>AC Terminals</b>	screw terminals for wire 2.5 - 4 mm <sup>2</sup> , 3 phase + earth (no neutral)							
<b>DC Terminals</b>	M12 bolts	M10 bolts	M10 bolts	M10 bolts	M10 bolts	M8 bolts	M8 bolts	M8 bolts
<b>Programming connector</b>	15 pole D-connector at rear panel							
<b>Interlock</b>	contact at rear panel							
<b>Cooling</b> audio noise level  air flow	low noise blower, fan speed adapts to temperature of internal system ca. 56 dBA at full load, 25 °C ambient temperature, 1 m distance ca. 62 dBA at full load, 50 °C ambient temperature, 1 m distance From left to right							
<b>Enclosure</b> degree of protection	IP20							
<b>Dimensions</b> front panel: h x w behind front panel: h x w x d	177 x 483 mm (19", 4 U) 177 x 443 x 500mm							
<b>Weight</b>	27 kg							

CV = Constant Voltage CC = Constant Current  
 Specifications measured at  $t_{amb} = 25 \pm 5 \text{ °C}$  and  $V_{in} = 400 \text{ VAC}$ , 50 Hz unless otherwise noted.  
 The information in this document is subject to change without notice.  
 Notes: 1. Measured at full load.  
 2. See safety Instructions in the operating manual.

## Typical Applications

- Solar inverter testing, PV-Simulation
- Hybrid Car testing systems
- ATE in industrial production lines
- Plasma chambers
- Automotive battery simulations
- Controlled battery (dis)charging
- Lasers
- Sustainable energy
- Driving PWM-Controlled DC motors
- Accurate current sources
- Aerospace and military equipment

## Available Options



### Increased Output Power

The conservatively rated unit allows to deliver extra output with the same reliability.

At some derating, either the maximum output voltage or the maximum output current can be increased by about 10%.

Order Code :

- P069



### High Speed Programming

A 10 to 20 times higher programming speed (down to 0.4ms rise time at full load)

and lower output capacitance<sup>1)</sup>. Excellent for laser applications, test systems or as current source with low parallel capacitance as used in plasma chambers.

Order Codes :

- SM 15-400 P166 – SM30-200 P167
- SM 45-140 P168 – SM60-100 P169
- SM 70-90 P170 – SM120-50 P171
- SM 300-20 P172 – SM600-10 P270



### Two-Quadrant Output Power Sink

Two quadrant operation maintains the DC output voltage constant regardless

the output power is positive or negative<sup>1)</sup>. Ideal for PWM-speed controlled DC-Motors and ATE systems.

Order Codes :

- SM 15-400 P230 – SM30-200 P231
- SM 45-140 P232 – SM60-100 P233
- SM 70-90 P234




### Sequencer

Arbitrary Waveform generator or standalone automation. The sequencer

Is integrated in the Ethernet controller.

Order Code :

- P157



### Digital CV- and CC-Settings

Reliable, long-life digital encoders can be implemented at the front panel. Includes

total front panel lock (also for CV- / CC-knobs) and a coarse or fine pitch adjustment depending on the turning speed. Is standard on SM300-20 and SM600-10.

Order Code :

- P220



### Secured Voltage and Current Settings

For maximum security, the CV/CC settings can be adjusted with a

screwdriver only and are protected with a plastic cap from accidental adjusting. SM300-20, SM600-10 and units with option P220 already have secured settings.

Order Code :

- P001




### Software Control and Interfaces

Interfaces to be installed by factory <sup>2)</sup>.

Order Code:

- ISO AMP Card - isolated analog - P154<sup>3)</sup>
- RS232 controller - P155
- Ethernet controller - P157 (including sequencer)


Notes: 1. Download datasheets about High Speed Programming, Power Sink and Battery Charging from [www.DeltaPowerSupplies.com](http://www.DeltaPowerSupplies.com).  
2. There is only room for one of the interfaces in a unit.  
3. SM300-20, SM 600-10 are standard equipped with ISO AMP, this can be replaced by RS232 (P155).

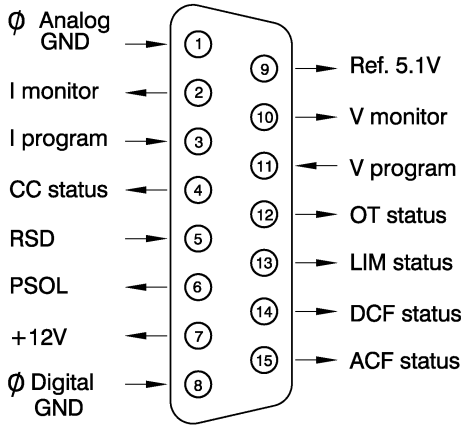


CV = Constant Voltage  
CC = Constant Current

Specifications measured at  
 $t_{amb} = 25 \pm 5 \text{ }^\circ\text{C}$  and  $V_{in} = 400 \text{ VAC}$ ,  
50 Hz unless otherwise noted.

The information in this document is  
subject to change without notice.

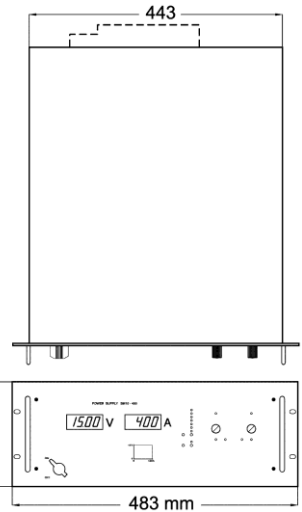

Connections analog programming connector

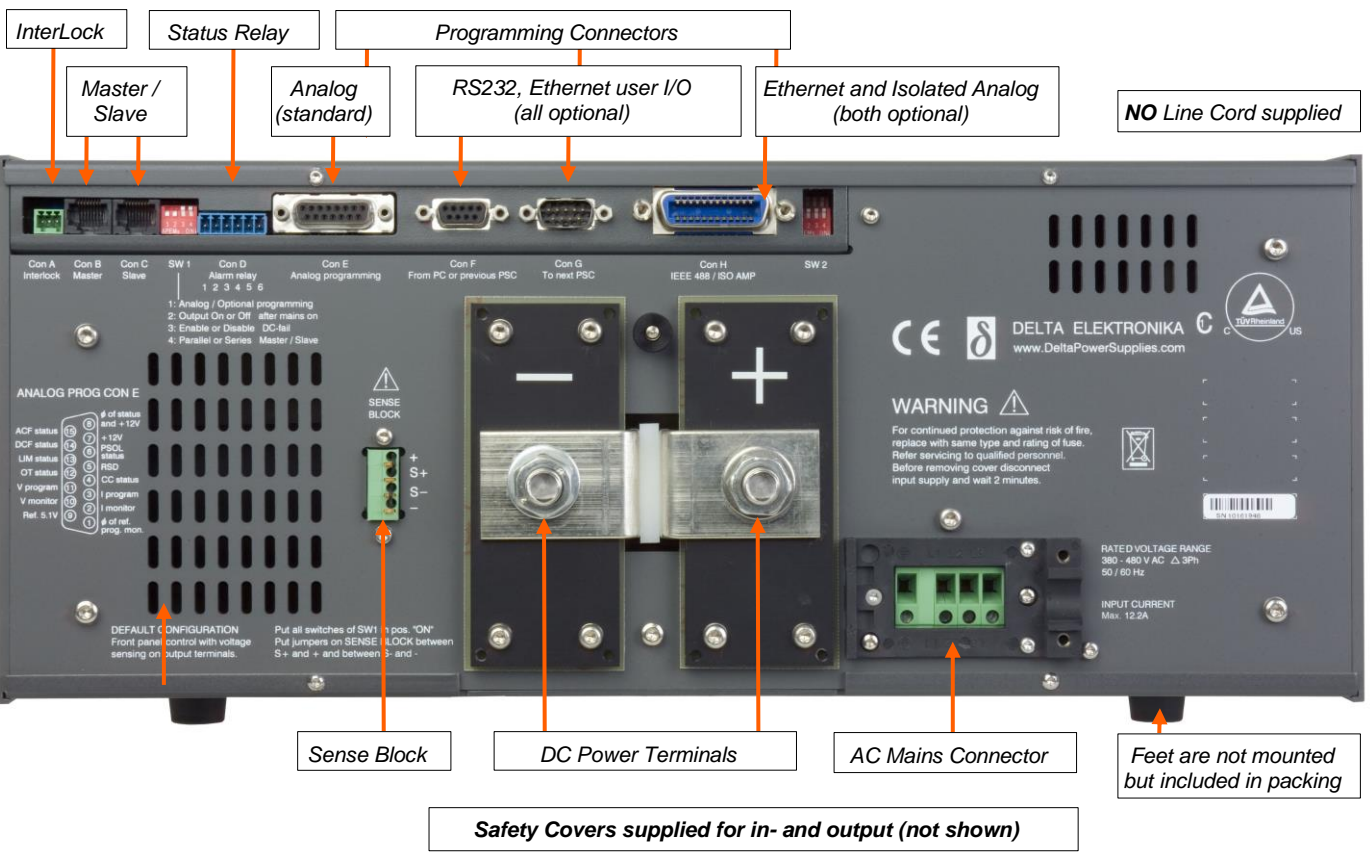

Note: SM300-20, SM600-10 are standard equipped with isolated analog programming via ISO AMP on CON H (CON E is not available).

